



# NEW ZEALAND & SOUTH PACIFIC PRODUCT CATALOGUE

**DEPEND ON IT**



Version #1



# THE ESSENCE OF ECHO

After a hard day's work with your chain saw, brushcutter, blower or hedge trimmer, do you ever spend time thinking about your ECHO tool? Do you ever wonder if it will easily start the next time you need it, will it have enough power or will it last until the job is done? Probably not. You don't have to think about your tool because we already have. Our philosophy is simple – to produce professional quality products that meet the demands of the people who use them.

The Essence of ECHO is a complex story intended to make your life simple. The many facets include:

## **Skilled Craftsmen**

For over 75 years we've been producing durable, dependable products. It starts with engineers who understand the requirements of the applications and optimise performance, durability and ergonomics. They are followed by those in manufacturing who take great pride in what they do: create components to exacting specifications and assemble them into products worthy of the ECHO name.

## **World Class Technology**

To be a global leader, you need to have cutting edge technology. We use the latest materials for strength and reduced weight. Computerised design and manufacturing allow us to meet tight tolerances, providing superior fit, finish and performance. Robots work tirelessly in tandem with our skilled associates for efficient and concise assembly of our products.

## **Integrated Production**

The engine is the heart of our products and we control the entire process. Our vertically integrated system starts with ingots and includes casting, machining, heat treating, polishing and plating, all done in Japan. When you are famous for your engines, you don't want to put your reputation in someone else's hands.

## **Relentless Commitment to Quality**

Check, check and re-check. Prototypes are field tested for months to assure they meet demanding criteria. Parts are continually measured to make sure there is no deviation. Assemblies are tested for fit. Every engine is started and measured to make sure they perform from the first pull. There are no assumptions and there is no "good enough."

# TRUST ECHO



## 5 YEAR DOMESTIC WARRANTY

5 years is a long time. Longer than you'll get from most of the equipment you buy. That's because we stand behind our products. We've been building equipment for professionals for over sixty years and that has given us an exceptional level of engineering and manufacturing expertise. As a home owner, you want long-term dependability enjoyed by professionals, and a well-built product that you can buy with confidence.



## 2 YEAR PROFESSIONAL WARRANTY

Yes, you did read that right. You can have absolute confidence in our equipment. ECHO is designed to be durable and to do what you ask it, wherever you take it. Not only that, our products are built to the highest standards of quality and performance. Our warranty is our statement of confidence and our badge of honour.



## 100% PROFESSIONAL GRADE

ECHO only builds equipment to one standard – professional. We manufacture products to suit the environment in which they will be used and the job they will be doing, and each piece of equipment is as durable as we can make it. We test our products in punishing conditions to ensure that they are capable of whatever you demand from them. So even if you don't use ECHO equipment professionally, the products you buy are already being used by people who do.



## JAPAN TECHNOLOGY

You know that equipment designed in Japan will be reliable. Well built. Dependable. Professional. Durable. Japan is the home of technological craftsmanship and the nation has won international respect for its manufacturing expertise. This global standard also extends to the equipment we manufacture and we are proud to be counted among those companies that help Japan maintain its reputation for the quality of its engineering and technology.

# 56V



## **CHAIN SAW** **DCS-2500T**

Rated voltage: 50.4V // Dry weight\*1: 1.7kg //  
Bar size: 20, 25cm / 8, 10in



## **TRIMMER** **DSRM-2600/L**

Rated voltage: 50.4V //  
Dry weight\*2: 3.2kg



## **CHAIN SAW** **DCS-3500**

Rated voltage: 50.4V // Dry weight\*1: 2.8kg //  
Bar size: 35cm / 14in



## **TRIMMER** **DSRM-2600/U**

Rated voltage: 50.4V //  
Dry weight\*2: 3.7kg



## **PRUNING SAW** **DHS-3006**

Rated voltage: 50.4V // Dry weight\*1: 1.1kg //  
Bar size: 15cm / 6in



## **HEDGE TRIMMER** **DHC-2200R**

Rated voltage: 50.4V // Dry weight\*3: 2.9kg //  
Cutting length: 562mm



# BATTERY SERIES



## PRO ATTACHMENT SERIES DPAS-2600

Rated voltage: 50.4V // Dry weight\*4: 2.4kg



3 CUTTER METAL BLADE  
AS OPTION



## 2.5 Ah BATTERY LBP-56V125

Rated voltage: 50.4V // Battery type: Li-ion //  
Battery capacity: 126Wh // Weight: 1.0kg



## 5.0 Ah BATTERY LBP-56V250

Rated voltage: 50.4V // Battery type: Li-ion //  
Battery capacity: 252Wh // Weight: 1.8kg



## RAPID CHARGER LCJQ-560

Battery charging time  
2.5Ah battery: 28min(80%), 47min (100%)  
5.0Ah battery: 56min(80%), 86min(100%)

Fits all ECHO professional 56V series batteries.



MTA-DAH MTA-DPP

MTA-DTB



MTA-TC



MTA-LE/E



MTA-PB



MTA-PS



## BLOWER DPB-2500

Rated voltage: 50.4V // Dry weight\*5: 2.6kg //  
Blowing air force: (STD)11.8N, (Boost)<sup>6</sup> 16.0N //  
Air volume\*2: (STD)769.8m<sup>3</sup>/h, (Boost)<sup>6</sup> 896.4m<sup>3</sup>/h //  
Max. air speed: (STD)56.7m/sec, (Boost)<sup>6</sup> 65.9m/sec



## BLOWER DPB-2600

Rated voltage: 50.4V // Dry weight\*3: 2.5kg //  
Blowing air force: (STD)12.8N, (Boost)16.7N //  
Air volume\*2: (STD)697m<sup>3</sup>/h, (Boost)798m<sup>3</sup>/h //  
Max. air speed: (STD)69.7m/sec, (Boost)79.5m/sec



# CHAIN SAWS

## FEATURES



**35cm GUIDE BAR  
AS STANDARD**  
14" sprocket nose bar

**CLUTCH-DRIVEN  
AUTOMATIC OILER**  
Lubricates the chain  
and stops oil flow when idling

**CLASS-LEADING  
LIGHTWEIGHT DESIGN**  
Improves versatility and  
reduces fatigue

**ES-START  
TECHNOLOGY**  
Effortless and  
easy start

**QUICK ACCESS FOR  
MAINTENANCE**  
Cylinder and filter cover  
are easily accessible via  
2 secure clips



**TRANSLUCENT  
OIL TANK WITH  
AIR EXPANSION  
CHAMBER**  
Quick level control  
and prevention of  
oil spillages

**34.4cm<sup>3</sup>  
2-STROKE ENGINE**  
Stratified scavenging  
technology - without  
catalytic converter

**G-FORCE ENGINE AIR  
PRE-CLEANER**  
Reduces maintenance  
as it protects against  
dirt and dust





**TRANSLUCENT  
FUEL TANK**  
For quick and easy  
level checks

**MOMENTARY SWITCH**  
User-friendly  
and efficient



**SPRING ANTI-  
VIBRATION SYSTEM**  
Precisely designed  
for user comfort and  
reduced stress

Specifications, descriptions, and illustrative materials in this literature are as accurate as known at the time of publication, but are subject to change without notice.



## **DCS-2500T**

Lightest professional battery top handle pruning saw of its kind.

Rated voltage: 50.4V // Dry weight\*1: 1.7kg // Bar size: 20, 25cm / 8, 10in



## **CS-281WES**

The CS-281WES is a light-weight, highly maneuverable petrol chain saw, ideal for pruning and hedging.

Engine displacement: 26.9cm<sup>3</sup> // Output: 1.09kW / 1.48ps // Dry weight\*2: 3.1kg // Bar size: 20, 25, 30cm / 8, 10, 12in



## **CS-2511TES**

The ultimate professional petrol saw for pruning and small removals. The most powerful and lightest of its kind and packed with features.

Engine displacement: 25.0cm<sup>3</sup> // Output: 1.11kW / 1.51ps // Dry weight\*2: 2.3kg // Bar size: 20, 25, 30cm / 8, 10, 12in



## **DCS-3500**

Powerful and versatile, professional battery chainsaw. Giving performance comparable 35 - 40cm<sup>3</sup> petrol saw.

Rated voltage: 50.4V // Dry weight\*1: 2.8kg // Bar size: 35cm / 14in



## **CS-362TES**

Well-balanced removal arborist saw packed with features. Features improved acceleration and emissions.

Engine displacement: 35.8cm<sup>3</sup> // Output: 1.50kW / 2.04ps // Dry weight\*2: 3.6kg // Bar size: 30, 35cm / 12, 14in



**NEW**

## **CS-3410**

Lightweight, easy-to-start petrol chainsaw built for farmers and private users. Ideal for light-duty tasks like firewood cutting and small tree felling.

Engine displacement: 34.4cm<sup>3</sup> // Output: 1.3kW / 1.77ps // Dry weight\*2: 3.7kg // Bar size: 30, 35cm / 12, 14in



\*1: Unit without battery, guide bar, saw chain and chain oil. \*2: Unit without guide bar, saw chain, chain oil and fuel.

# CHAIN SAWS



## CS-3510ES

Lightest of its kind farmer saw with agile, high-performance, easy to start engine. Perfect for limbing, firewood or smaller tree felling.

Engine displacement: 34.4cm<sup>3</sup> // Output: 1.51kW / 2.05ps // Dry weight\*1: 3.7kg // Bar size: 30, 35, 40cm / 12, 14, 16 in



## CS-590

Light weight, professional saw renowned for its performance and dependability.

Engine displacement: 59.8cm<sup>3</sup> // Output: 2.98kW / 4.05ps // Dry weight\*1: 6.0kg // Bar size: 40, 45, 50cm / 16, 18, 20in



## CS-3510AC

Ultra-light farm all-rounder chainsaw, featuring ECHO's patented hassle-free starting system. Perfect for limbing, firewood or smaller tree felling.

Engine displacement: 34.4cm<sup>3</sup> // Output: 1.51kW / 2.05ps // Dry weight\*2: 3.8kg // Bar size: 30, 35, 40cm / 12, 14, 16in



## CS-4510ES

Powerful and very smooth farmer saw for intense tasks. Featuring many of ECHO's "comfort" features as standard.

Engine displacement: 45.0cm<sup>3</sup> // Output: 2.3kW / 3.1ps // Dry weight\*1: 5.0kg // Bar size: 33, 38, 45, 50cm / 13, 15, 18, 20in



## CS-7310SX



Heavy-duty, professional felling saw with outstanding air-filtration system and renowned for its dependability.

Engine displacement: 73.5cm<sup>3</sup> // Output: 4.1kW / 5.6ps // Dry weight\*1: 6.7kg // Bar size: 45, 50, 60, 70cm / 18, 20, 24, 28in




\*1: Unit without guide bar, saw chain, chain oil and fuel.

# POWER PRUNERS, TRIMMERS & BRUSHCUTTERS

-  Model certified for CE
-  ES-Start
-  Side access chain tensioner
-  Heavy duty air filter
-  U handle
-  Loop handle
-  ANTI VIBE Super anti-vibration system

## POWER PRUNER **EXTENDABLE**

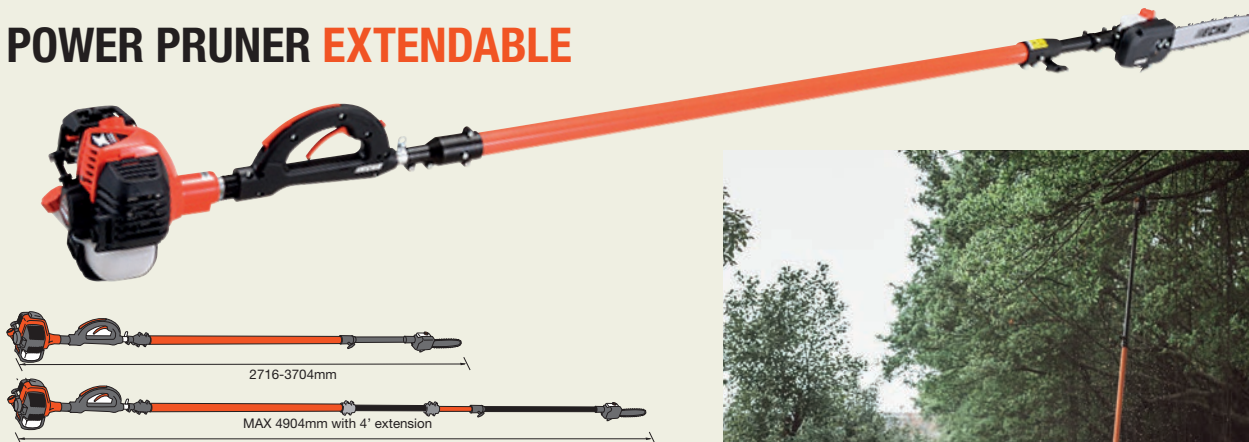

### **PPT-2620ES**

Powerful, lightweight extendable and telescopic power pruner with ergonomic loop handle.

Engine displacement: 25.4cm<sup>3</sup> // Output: 1.04kW / 1.41ps // Dry weight\*1: 8.0kg // Overall length: 2716-3704mm



### **GT-222ES**

Light weight curved shaft trimmer, built to increase maneuverability and efficiency in domestic and farm usage.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.7kW / 1.0ps // Dry weight\*2: 4.3kg



### **SRM-237TES/L**



High power, low weight brushcutter featuring a high-torque engine for more power when tackling thicker brush.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.7kW / 1.0ps // Dry weight\*2: 5.1kg



### **SRM-222ES/L**

Make light work of brush with the ECHO SRM-222ES, professional grade, loop handle petrol brushcutter.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.7kW / 1.0ps // Dry weight\*2: 4.5kg



### **SRM-2621TES/L**



Professional, petrol trimmer with a high-torque gear case providing incredible combination of high power and low weight.

Engine displacement: 25.4cm<sup>3</sup> // Output: 1.0kW / 1.4ps // Dry weight\*1: 5.7kg



\*1: Unit without guide bar, saw chain, harness, chain oil and fuel. \*2: Unit without fuel, cutting attachment, guard and harness.

# TRIMMERS & BRUSHCUTTERS



**TRIMMER**  
**DSRM-2600/L**

Rated voltage: 50.4V // Dry weight\*2: 3.2kg



**TRIMMER**  
**DSRM-2600/U**

Rated voltage: 50.4V // Dry weight\*2: 3.7kg



**SRM-2621TES/U**

Professional, petrol trimmer with a high-torque gear case providing incredible combination of high power and low weight.

Engine displacement: 25.4cm<sup>3</sup> // Output: 1.0kW / 1.4ps // Dry weight\*1: 5.8kg



**HIGH TORQUE**



**SRM-3021TES/U**

**HIGH TORQUE**

Light weight, professional powerhouse with a high-torque gear case.

Engine displacement: 30.5cm<sup>3</sup> // Output: 1.3kW / 1.8ps // Dry weight\*1: 5.9kg



**SRM-420TES/U**

**HIGH TORQUE**

Very powerful, professional brushcutter with a high-torque gear case for heavy-duty trimming.

Engine displacement: 41.5cm<sup>3</sup> // Output: 1.8kW / 2.4ps // Dry weight\*1: 8.7kg



**SRM-520ES**

Extremely powerful, professional brushcutter built for daily commercial use.

Engine displacement: 50.2cm<sup>3</sup> // Output: 2.2kW / 3.0ps // Dry weight\*1: 9.0kg



# TRIMMERS & BRUSHCUTTERS **ACCESSORIES**

## METAL BLADE

A variety of brush and dense blades are available for any ECHO brushcutter.



### 3-CUTTER BLADE

230mm (t2.0): Part# X405-000011  
255mm (t2.0): Part# X405-000001



### 4-CUTTER BLADE

230mm (t2.0): Part# X400-000021  
255mm (t1.4): Part# 696001-64133  
255mm (t2.0): Part# X400-000032



### CLEARING SAW BLADE

200mm (t1.5): Part# X040-000090  
Arbot:20mm



### SHREDDER BLADE SHIELD KIT

Part# P021-035961



### PRS-231M

Item# C6000196  
Pipe sleeves and gear case adapters included.

The PRS-231M attachment features two contra-rotating blades that 'snip' the grass or brush, just like scissors. This allows you to trim right up to any surface with no risk of damage or injury from kickback or thrown objects. Perfect for trimming near bystanders, parked vehicles, office windows and in areas containing loose objects.



### 3-CUTTER BLADE

230mm (t3.0): Part# P021-014310  
255mm (t3.0): Part# P021-014320



### 8-CUTTER BLADE

230mm (t1.8): Part# X405-000130  
255mm (t1.4): Part# 696001-55632  
255mm (t2.0): Part# X405-000141



### SHREDDER BLADE

Part# X413-000040



### SAW BLADE SHIELD

Part# P100-008860  
Can not be used with X040-000090



### SF400 TRIMMER HEAD

Part# SF400/E




### SF500 TRIMMER HEAD

Part# SF500/E

ECHO's patented revolutionary Speed-Feed® trimmer head takes the hassle out of refilling your trimmer head and is the easiest loading tap-to advance head available. In fact the Speed-Feed reloads in under 30 seconds with just three easy steps, all without taking the head apart. SF400 is perfectly balanced for vibration-free operation and comes pre-loaded with 2.4mm Black Diamond™ line.

1. Line-up Arrows



2. Feed Line



3. Twist Top Disc



## BRUSHCUTTER HARNESS



### ERGONOMIC HARNESS


Part# C062-000550



### ERGO PRO FLEX

Part# C6000413

# PRO ATTACHMENT SERIES

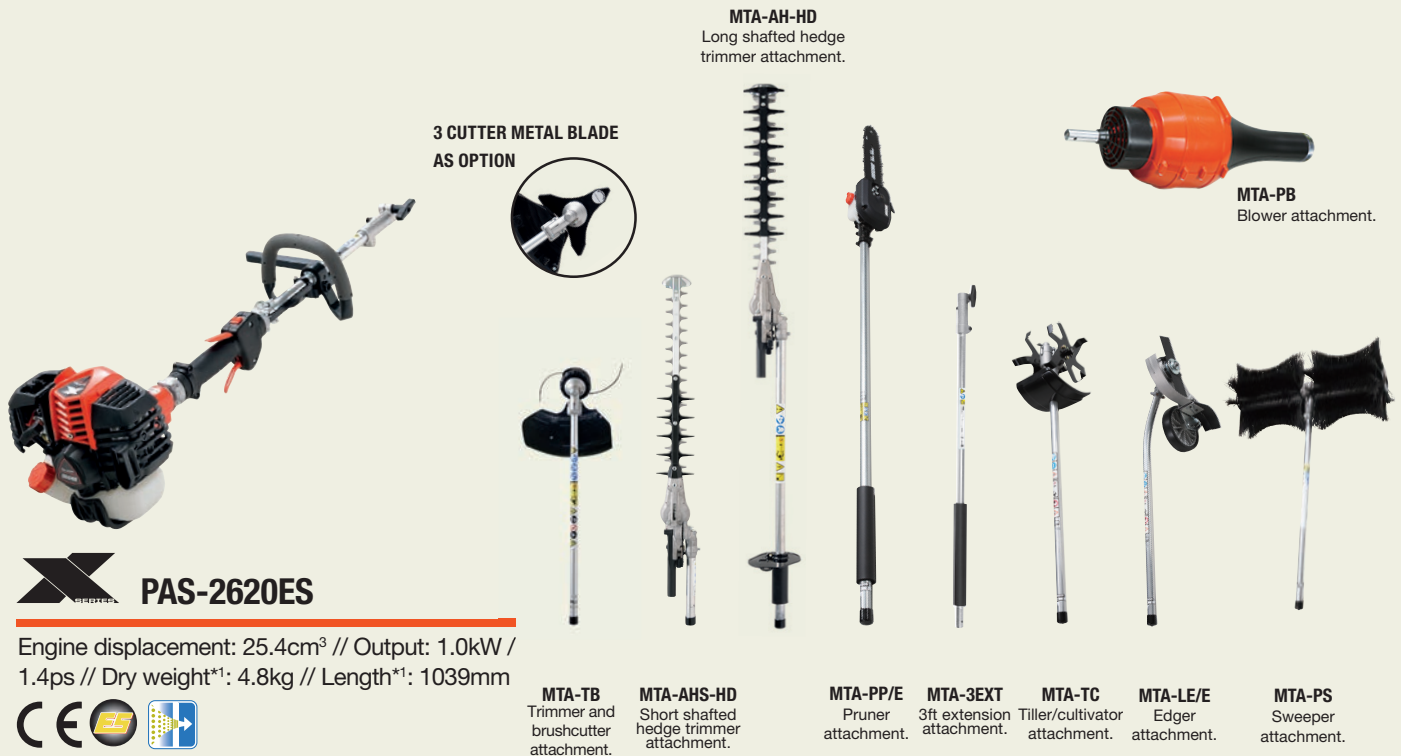

## PAS-2620ES

Engine displacement: 25.4cm<sup>3</sup> // Output: 1.0kW / 1.4ps // Dry weight\*1: 4.8kg // Length\*1: 1039mm



3 CUTTER METAL BLADE AS OPTION



MTA-AH-HD  
Long shafted hedge trimmer attachment.

MTA-PB  
Blower attachment.

MTA-TB  
Trimmer and brushcutter attachment.

MTA-AHS-HD  
Short shafted hedge trimmer attachment.

MTA-PP/E  
Pruner attachment.

MTA-3EXT  
3ft extension attachment.

MTA-TC  
Tiller/cultivator attachment.

MTA-LE/E  
Edger attachment.

MTA-PS  
Sweeper attachment.

## SPECIFICATIONS

### PRO ATTACHMENT SERIES

	PRO ATTACHMENT SERIES
	PAS-2620ES
Engine displacement (cm <sup>3</sup> )	25.4
Output (kW / ps)	1.0 / 1.4
Dry weight (kg)*1	4.8
Length (mm)	1039
Start assist system	ES-Start
Fuel tank capacity (mL)	600
Fuel consumption at maximum engine power (L/h)	0.61
Warranty	5 year domestic + 2 year professional

### PRO ATTACHMENT SERIES

	PRO ATTACHMENT SERIES
	DPAS-2600
Rated Voltage (V)	50.4
Dry weight (kg)*2	2.4
Run Time (min)*3	-
Drive Shaft Type	Flexible
Drive Shaft Diameter (mm)	6.1
Main Pipe Diameter (mm)	25.0
Warranty	5 year domestic + 2 year professional + 2 year battery

\*1: Unit without attachment. \*2: Unit without battery and attachment.  
\*3: See Pro attachment series attachment run time. \*4: With 4.5Ah battery.  
\*5: With DPAS-2600 power head. \*6: Without cutting attachment and shield.  
\*7: Without guide bar and saw chain. \*8: With standard 25cm guide bar and saw chain.  
\*9: Without blade. \*10: According to test codes referred in Machinery Directive.

### PRO ATTACHMENT SERIES ATTACHMENT

	TRIMMER/ BRUSHCUTTER ATTACHMENT			
	MTA-TB	MTA-DTB		
Dry weight (kg)	1.0*6	0.9*6		
Run Time (min)*4*5	-	Up to 32 (SF400)		
Length (mm)	815*6	818*6		
Drive shaft diameter (mm)	6.1	6.0		
Main pipe diameter (mm)	25.0	25.0		
Gear reduction ratio	1.36	1.62		
Cutting length (mm)	-	-		
Cutter pitch (mm)	-	-		
Applicable bar length (cm / inch)	-	-		
Saw chain pitch (inch)	-	-		
Cutting blade length (mm)	-	-		
Culti rotor diameter (mm)	-	-		
Culti rotor width (mm)	-	-		
Maximum sweeping width (mm)	-	-		
Air volume (m <sup>3</sup> /h)	-	-		
Maximum air speed (m/sec)	-	-		
Warranty	5 year domestic + 2 year professional	5 year domestic + 2 year professional		
Vibration levels Front handle /Rear handle (m/s <sup>2</sup> )*10	4.3 / 4.5 (Blade) 3.1 / 2.8 (Nylon line)	3.8 / 2.9 (Nylon line)		
Sound pressure level (dB(A))*10	92.3(Blade) 93.3(Nylon line)	79.6 (Nylon line)		
Sound power level (dB(A))*10	104.0(Blade) 105.8(Nylon line)	92.0 (Nylon line)		
Uncertainty*10	(K)	Vibration levels (m/s <sup>2</sup> )	0.8(Blade) 1.2(Nylon line)	1.5 (Nylon line)
	(K <sub>PA</sub> )	Sound pressure levels (dB(A))	0.8(Blade) 1.5(Nylon line)	3.0 (Nylon line)
	(K <sub>WA</sub> )	Sound power levels (dB(A))	1.6(Blade) 2.1(Nylon line)	3.0 (Nylon line)



**3 CUTTER METAL BLADE AS OPTION**



**DPAS-2600**

Rated voltage: 50.4V // Dry weight\*2: 2.4kg



**MTA-DTB**  
Trimmer and brushcutter attachment.

**MTA-DAH**  
Long shafted hedge trimmer attachment.

**MTA-DPP**  
Pruner attachment.

**MTA-TC**  
Tiller/cultivator attachment.

**MTA-LE/E**  
Edger attachment.

**MTA-PB**  
Blower attachment.

	HEDGE TRIMMER			POWER PRUNER		TILLER CULTIVATOR	EDGER	PROSWEEP	BLOWER	EXTENSION
	MTA-AHS-HD	MTA-AH-HD	MTA-DAH	MTA-PP/E	MTA-DPP	MTA-TC	MTA-LE/E	MTA-PS	MTA-PB	MTA-3EXT
	2.1	2.6	2.0	1.8	1.3*7	2.3*8	2.4*9	5.3	1.8	1.2
	-	-	Up to 99	-	Up to 48	Up to 147	Up to 96	Up to 126	Up to 11	-
	966	1637	1242	1451*8	1464*8	907	787*9	797	635	1000
	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	10.5	6.1
	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
	4.6	4.6	4.6	1.53	0.94	42.75	2.07	42.75	-	-
	536	536	536	-	-	-	-	-	-	-
	35	35	35	-	-	-	-	-	-	-
	-	-	-	25 / 10	25 / 10	-	-	-	-	-
	-	-	-	3/8	1/4	-	-	-	-	-
	-	-	-	-	-	-	197	-	-	-
	-	-	-	-	-	220	-	-	-	-
	-	-	-	-	-	161	-	-	-	-
	-	-	-	-	-	-	-	598	-	-
	-	-	-	-	-	-	-	-	654	-
	-	-	-	-	-	-	-	-	52.86	-
	5 year domestic + 2 year professional	5 year domestic + 2 year professional	5 year domestic + 2 year professional	5 year domestic + 2 year professional	5 year domestic + 2 year professional	5 year domestic + 2 year professional	5 year domestic + 2 year professional	5 year domestic + 2 year professional	5 year domestic + 2 year professional	5 year domestic + 2 year professional
	7.8 / 6.9	8.4 / 5.9	4.2 / 2.4	4.5 / 3.3	4.4 / 2.1	2.7 / 1.3 (DPAS-2600) 5.0 / 6.0 (PAS-2620ES)	3.5 / 1.8 (DPAS-2600) 2.6 / 4.3 (PAS-2620ES)	2.5 / 1.3 (DPAS-2600) 4.7 / 4.6 (PAS-2620ES)	3.3 / 1.3 (DPAS-2600) 2.7 / 5.2 (PAS-2620ES)	-
	95.5	95.8	85.5	94.1	94.4	75.2 (DPAS-2600) 97.0 (PAS-2620ES)	79.3 (DPAS-2600) 95.5 (PAS-2620ES)	77.3 (DPAS-2600) 96.7 (PAS-2620ES)	90.0 (DPAS-2600) 93.7 (PAS-2620ES)	-
	107.9	108.4	93.4	106.5	105.2	91.5 (DPAS-2600) 105.6 (PAS-2620ES)	93.5 (DPAS-2600) 103.8 (PAS-2620ES)	90.1 (DPAS-2600) 105.7 (PAS-2620ES)	100.3 (DPAS-2600) 105.4 (PAS-2620ES)	-
	5.0	5.0	1.5	3.3	1.5	1.5 (DPAS-2600) 3.8 (PAS-2620ES)	1.5 (DPAS-2600) 3.4 (PAS-2620ES)	1.5 (DPAS-2600) 4.0 (PAS-2620ES)	1.5 (DPAS-2600) 5.0 (PAS-2620ES)	-
	2.5	2.5	3.0	2.5	3.0	3.0 (DPAS-2600) 2.5 (PAS-2620ES)	3.0 (DPAS-2600) 2.5 (PAS-2620ES)	3.0 (DPAS-2600) 2.5 (PAS-2620ES)	3.0 (DPAS-2600) 2.5 (PAS-2620ES)	-
	2.5	2.5	3.0	2.5	3.0	3.0 (DPAS-2600) 2.5 (PAS-2620ES)	3.0 (DPAS-2600) 2.5 (PAS-2620ES)	3.0 (DPAS-2600) 2.5 (PAS-2620ES)	3.0 (DPAS-2600) 2.5 (PAS-2620ES)	-

# HEDGE TRIMMERS

 Model certified for CE
  ES-Start
  ANTI VIBE Super anti-vibration system
  Rotatable handle
  Adjustable cutter clearance
  Adjustment-free
  Tip guard



## DHC-2200R

Ultra light weight, professional battery hedge trimmer with a 56 cm Japanese blade. Capable of fine trimming and rough cutting.

Rated voltage: 50.4V // Dry weight\*1: 2.9kg // Cutting length: 562mm






**56V**



## HC-2020R

Light weight, professional double-sided hedge trimmer with 534mm and a rotatable handle.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.6kW / 0.8ps // Dry weight\*2: 4.6kg // Cutting length: 534mm







## HC-2020

Light weight, professional double-sided hedge trimmer with 534mm blade suitable for medium sized jobs.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.6kW / 0.8ps // Dry weight\*2: 4.5kg // Cutting length: 534mm






## HCR-165ES

Professional, light weight double-sided hedge trimmer with 639 mm blade and rotating handle.

Engine displacement: 21.2cm<sup>3</sup> // Output: 0.6kW / 0.8ps // Dry weight\*2: 5.1kg // Cutting length: 639mm









# BLOWERS HANDHELD



## DPB-2500

A lightweight yet powerful 56V brushless blower offering gas-like performance, perfect for those seeking high efficiency and ease of use.

Rated voltage: 50.4V // Dry weight\*1: 2.6kg //  
 Blowing air force: (STD)11.8N, (Boost)\*716.0N //  
 Air volume\*6: (STD)769.8m<sup>3</sup>/h, (Boost)\*7896.4m<sup>3</sup>/h //  
 Max. air speed: (STD)56.7m/sec, (Boost)\*765.9m/sec



## PB-2520

Light weight, professional handheld blower, that's packed with power and features to increase productivity.

Engine displacement: 25.4cm<sup>3</sup> // Output: 0.9kW / 1.2ps //  
 Dry weight\*2: 3.9kg // Blowing air force\*3\*5: 15.8N //  
 Air volume\*3\*5: 768m<sup>3</sup>/h // Max. air speed\*3\*5: 76.2m/sec



## DPB-2600

World's first dual-intake blower and ECHO's most powerful handheld blower. Ultra light weight and packed with patented features and technology.


Rated voltage: 50.4V // Dry weight\*1: 2.5kg //  
 Blowing air force: (STD)12.8N, (Boost)16.7N //  
 Air volume\*6: (STD)697m<sup>3</sup>/h, (Boost)798m<sup>3</sup>/h //  
 Max. air speed: (STD)69.7m/sec, (Boost)79.5m/sec



## PB-2620

Successor to the PB-2520 and ECHO's most powerful hand-held petrol blower.

Engine displacement: 25.4cm<sup>3</sup> // Output: 0.9kW / 1.2ps //  
 Dry weight\*2: 4.4kg // Blowing air force\*3\*5: 15.8N //  
 Air volume\*3\*5: 774m<sup>3</sup>/h // Max. air speed\*3\*5: 76.7m/sec

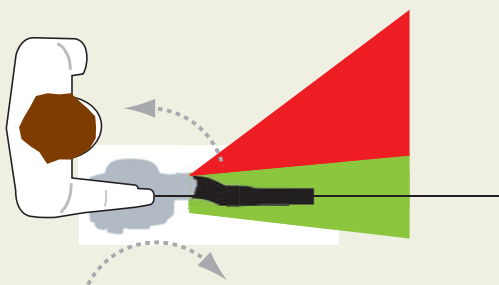

## ROTATIONAL CONTROL

ECHO reduces the effort required to keep the blower from rotating in towards the operator's legs (like most handheld models do) and actually delivers a slight pull away from the operator (green section). The effect makes the blower easier to handle and reduces stress on the operator's arm.



\*1: Unit with blower pipes, without battery. \*2: Unit with blower or vacuum pipes (standardised nozzle type A), empty fuel tank.  
 \*3: Unit with blower pipes (standardised nozzle type A). \*4: Unit with blower pipes (standardised nozzle type B).  
 \*5: Measured in accordance with ANSI/OPEI B175.2. \*6: At actual usage point (measured with blower pipes). \*7: With 4.5Ah battery.

# SHRED 'N' VAC



Model certified for CE



ES-Start



Heavy duty air filter



Super anti-vibration system



EZ-Lock system



Posi-loc pipe system



Ventilated back pad



## ES-250ES

Professional Shred 'n' Vac blower, allowing you to blow, shred and vacuum leaves with ease.

Engine displacement: 25.4cm<sup>3</sup> // Output: 0.7kW / 1.0ps //

Dry weight\*<sup>1</sup>: 5.7kg // Blowing air force\*<sup>3\*4</sup>: 12.0N //

Air volume\*<sup>3\*4</sup>: 576m<sup>3</sup>/h // Max. air speed\*<sup>3\*4</sup>: 81.7m/sec



# BLOWER BACKPACK



## PB-8010

Ultra powerful professional backpack blower that's become known as "The Beast" due to its 44.4N of blowing force.

Engine displacement: 79.9cm<sup>3</sup> // Output: 4.2kW / 5.7ps //

Dry weight\*<sup>1</sup>: 12.0kg // Blowing air force\*<sup>2\*4</sup>: 44.4N //

Air volume\*<sup>2\*4</sup>: 1819m<sup>3</sup>/h // Max. air speed\*<sup>2\*4</sup>: 94.5m/sec



# ENGINE CUTTER



## ENGINE CUTTER CSG-7410ES

Extremely powerful, high torque engine cutter with incredible air filtration system. Blade not included.

Engine displacement: 73.5cm<sup>3</sup> // Output: 3.2kW / 4.4ps //  
Dry weight\*1: 10.3kg (14inch) //  
Applicable blade diameter: 350mm (14inch)



## CART WATER KIT CWT-7410

Engine cutter cart for ECHO CSG-7410ES. CSG-7410 and blade not included.

Weight\*2: 29.5kg // Water tank capacity 10L //  
Maximum cutting depth: 120mm



\*1: Unit without cutting wheel and with empty tank. \*2: Unit without engine cutter and with empty water tank.

# ENGINE OIL

## 2-STROKE ENGINE OIL **ECHO POWER BLEND GOLD**

Quality engine oil plays a vital role in clean and efficient engine running and provides excellent protection against rust, wear and corrosion. Exclusively blended and tuned for ECHO 2-stroke engines, Power Blend is the best fit for your ECHO machine. The oil exceeds ISO-LEGD and JASO M345/FD requirements and has superior cleaning capabilities. By preventing carbon build up, exhaust gas blockages are minimised, assuring superior protection and smooth operation.



# SAFETY GEAR



## EAR MUFFS

Part# C9500526



## HELMET

Part# C6000340



## VISOR/MUFFS

Part# C9500524



## CHAIN SAW CHAPS

APRON DESIGN

36" Part# C9500521

40" Part# C9500522



## CHAIN SAW CHAPS

FULL-WRAP DESIGN

36" Part# C9500604

40" Part# C9500523



## SHIN GUARDS

Part# C9500200

# PRODUCT ICONS



## MODEL CERTIFIED FOR CE

Model certified for CE and RoHS compliant.



## TIP GUARD

Tip guard prevents blade contact with fences or buildings.



## POSI-LOC PIPE SYSTEM

Posi-loc for a secure connection.



## EZ-LOCK SYSTEM

EZ lock for secure pipe-to-housing connection.



## VENTILATED BACK PAD

Ventilated back pad for operator cooling.



## ES-START

Spring-assisted starting system for easier starting.



## ELECTRONIC CONTROL

Provides effortless starts and stable performance.



## HEAVY DUTY AIR FILTER

Heavy duty air filter for reduced maintenance and less downtime.



## SUPER ANTI-VIBRATION SYSTEM

Super anti-vibration system for reduced vibration.



## LOW-TONE MODEL

Low-tone for comfortable operation.



## G-FORCE ENGINE AIR PRE-CLEANER™

G-FORCE Engine Air Pre-Cleaner for reduced air filter maintenance.



## SPIKE

Spike as standard.

OPTION



## OPTIONAL SPIKE

Spike as optional.



## HYBRID 4

Super-low starting effort, quiet and economical operation.



## QUICK DRAW

Clip and unclip your saw with one quick movement thanks to the patented design.



## TWYND

Draws air from both sides, for more power and balance.



## ROTATIONAL CONTROL

Rotational control design reduces gyro effect on user's wrist for operator comfort.



## AUTO CHOKE

Solenoid valve at carburetor controls amount of fuel depending on the engine temperature.



## AUTOMATIC FAST IDLE

Integrated choke and fast idle with trigger release for easy starting.



## SIDE ACCESS CHAIN TENSIONER

Side access chain tensioner for quick chain adjustments.



## U HANDLE

Model with U type handle.



## LOOP HANDLE

Model with loop type handle.



## HIGH TORQUE

High torque gear ratio for more efficient work.



## ROTATABLE HANDLE

Rotatable rear handle for comfortable operation in all positions.



## ADJUSTABLE CUTTER CLEARANCE

Cutter clearance is adjustable.



## ADJUSTMENT-FREE

Cutter clearance is adjustment-free.



## RoHS

Model certified RoHS.



DISTRIBUTED THROUGHOUT NEW ZEALAND & SOUTH PACIFIC BY



[camaproducts.co.nz](http://camaproducts.co.nz)

